

AMPLPULS


AMGR010□N Series



▲ Features

- Universal AC input/full range
- Protections:short circuit/overload/over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- LED indicator for power on
- No load power consumption<0.75W
- 100% full load burn -in test
- 3 years warranty

▲ Model Encoding

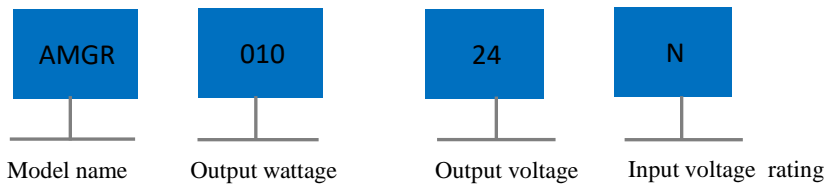


AMPLPULS

Specification

Input				
Voltage range	85-264VAC 120-370VDC			
AC current	0.33A/115VAC 0.21A/230VAC			
Frequency range	47-63Hz			
Inrush current (max)	Cold start: 35A/115VAC 70A/230VAC			
Output				
DC voltage (V)	5V	12V	15V	24V
Efficiency	76%	80%	80%	83%
Rated Current (A)	2A	0.84A	0.67A	0.42A
Rated power(W)	10W	10W	10W	10W
Ripple & noise(max) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p
Voltage tolerance Note.3	±5%	±3%	±3%	±2%
Line regulation	±1%	±1%	±1%	±1%
Load regulation	±5%	±3%	±3%	±2%
Setup, rise time Note.4	500ms 30ms/230VAC 1000ms 30ms/115VAC(at full load)			
Hold up time	120ms/230VAC 25ms/115VAC(at full load)			
Status indicator	Green LED			
Protection				
Overload	105%-150% rated output power			
	Protection type: Hiccup mode, recovers automatically after fault condition is removed			
Over voltage(V)	5.75-6.75V	13.8-16.2V	17.25-20.25V	27.6-32.4V
	Protection type: Shut down O/P voltage ,re-power on to recover			
Safety and EMC				
Withstand voltage	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
Isolation resistance	I/P-O/P,I/P-FG,O/P-FG :100M Ohms/500VDC/25℃/70%RH			
Safety standards	60950-1、GB4943.1			
EMC emission	Compliance to EN55011,EN55032(CISPR32)EN61204-3 Class B,EN61000-3-2,-3			
EMC immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024,EN61000-6-1,EN61204-3 light industry level, criteria A			
Environmental				
Working temperature	- 20~+70 ℃ (Refer to "Derating curve ")			
Storage temperature	-40~+85℃			
Storage humidity	10-95%RH			
Vibration	Component:10-500Hz,2G 10 min/1cycle ,60 min.each along X,Y,Z axes			
Others				
Mean time between failure	584K hrs min MIL-HDBK-217F(25℃)			
Installation	Install on DIN rail TS35			
Protection class	IP20			
Weight	About 0.18kg			
Length*width*height	90*22.5*100mm			
Data		Details	Model name	
		AMGR 10W 2A/5V	AMGR01005N	
		AMGR 10W 0.84A/12V	AMGR01012N	
		AMGR 10W 0.67A/15V	AMGR01015N	
		AMGR 10W 0.42A/24V	AMGR01024N	


AMPLPULS

Installation Instruction

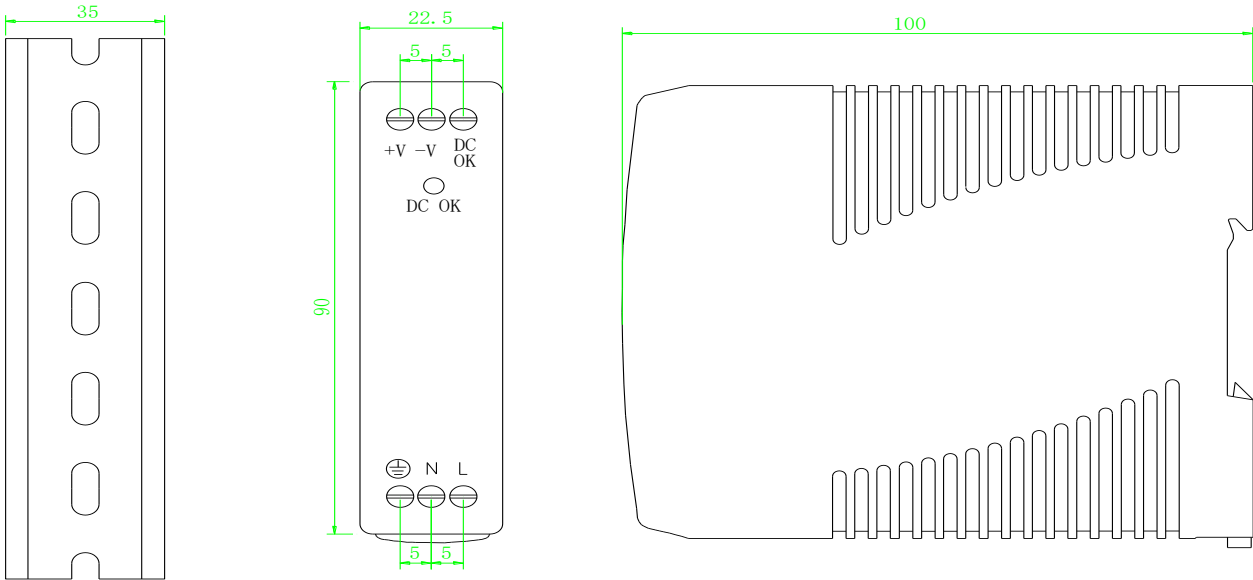

Install DIN rail TS35/7.5 or TS35/15
Tightening Torque Max. :5 kgf-cm (4.4 Lb-in)

Derating curve

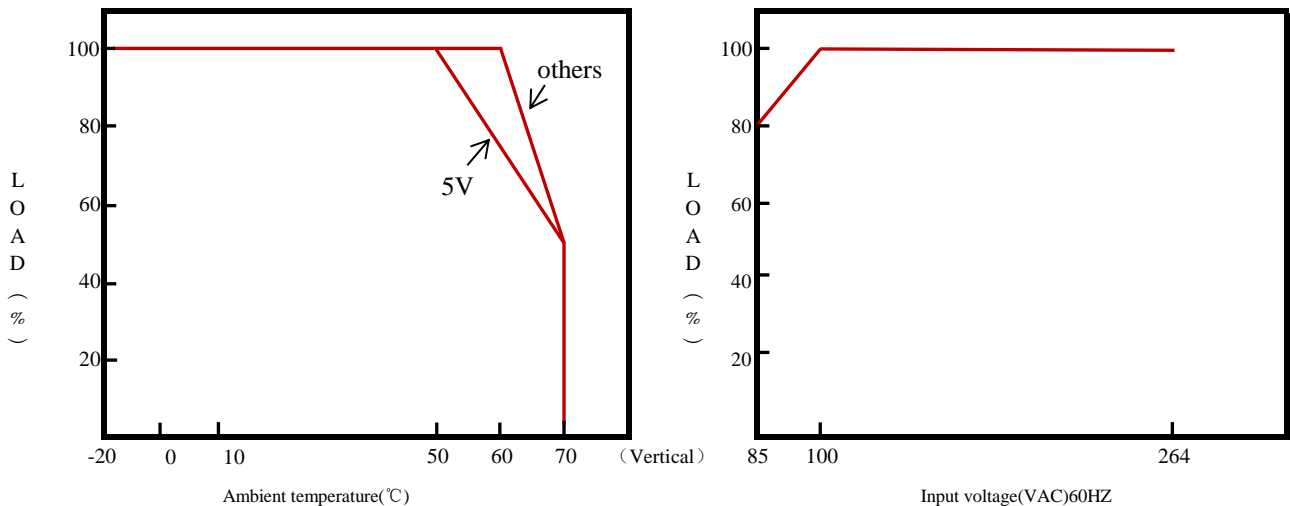

Note:

- 1.All parameters NOT specially mentioned are measured at 230VAC input,rated load and 25°C of ambient temperature.
- 2.Ripple & noise are measured at 20MHZ of bandwidth by using a "12"twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3.Tolerance:includes set tolerance,line regulation and load regulation.
- 4.Length of set up time is measured at cold first statr.Turning ON/OFF the power supply may lead to increase of the set up time.
- 5.The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).